

STAR® High Pressure Threaded Fittings

NOV Fiber Glass Systems provides a broad range of high pressure fiberglass fittings and accessories to accompany our high pressure line pipe. This allows for a complete corrosion free piping system. All of these fittings are manufactured using the filament winding method of fabrication, using premium glass fibers, and quality epoxy resins. This ensures maximum pressure capabilities of these composite elements.

Features for these fiberglass pipe fittings include:


- Pressure ratings are per STAR Standard Design. For API 15HR pressure ratings, refer to table below.
- Multiple pressure classes at design temperature
- Design temperature of 200°F (93°C)
- API 5B EUE or OD 8rd or 10rd threaded connections
- Multiple sizes to match all of the manufactured pipe sizes and pressure classes
- Mill tested to 1.25 times Design Pressure Rating
- Cyclo-aliphatic amine cured epoxy resin system (all fittings unless otherwise shown)

General Notes:

1. All fittings center line to face dimensions are nominal ± ¼ inch (6.4 mm).
2. All fittings are filament wound fiberglass reinforced epoxy.
3. Thread sizes correspond to thread types listed in product specifications. All 1½” EUE 10rd and 2¾” - 4½” EUE 8rd API threads conform to API 5B Table 2.6a (L4 is minimum) and all 5½” - 9¾” OD 8rd casing threads conform to API 5B Table 2.3 (L4 is minimum). The 2”-12” Star Super Seal is a proprietary connection.
4. The insertion depth or make-up length loss is listed by size under (X₁ or X₂) as inches (mm) per connection.
5. Typical dimensions are listed one time per section.
6. Weights are approximate.
7. Dimensions are U.S. Customary converted to metric.
8. API 15HR fittings require higher rated fittings according to the following table.
9. All fittings are designated by thread size based on pressure class of the pipe.
10. When ordering flanged valves, the ANSI bolt pattern should match the bolt pattern of the fiberglass flange. Some high pressure (>3000 psi) line pipe use a larger thread size, requiring a different ANSI bolt pattern.


API 15HR Pressure Rating With Factor psi	Equivalent Standard Design Rating psi	Available Standard Design Fitting Rating psi
500 x 1.20 =	600	800
750 x 1.20 =	900	1000
1000 x 1.20 =	1200	1250
1250 x 1.20 =	1500	1500
1500 x 1.20 =	1800	2000
1750 x 1.20 =	2100	2500
2000 x 1.20 =	2400	2500
2250 x 1.20 =	2700	3000
2500 x 1.20 =	3000	3000
2750 x 1.20 =	3300	3500
3000 x 1.20 =	3600	4000
3250 x 1.20 =	3900	4000

90° Elbow
Female x Female




Thread Size Inches	Pressure Rating psi (MPa)	A		B		Wt Lbs (kg)
		In (mm)	In (mm)	In (mm)	X ₁ (mm)	
1.90	2000 (13,8)	4.25 (108,0)	3.0 (76,2)	2.06 (52,4)	4 (1,81)	
	2500 (17,2)		3.2 (81,3)		4.5 (2,04)	
	3000 (20,7)		3.4 (86,4)		5 (2,27)	
	4000 (27,6)		3.8 (96,5)		6 (2,72)	
2 3/8	1250 (8,6)	5.00 (127,0)	3.2 (81,3)	2.56 (65,1)	5 (2,27)	
	2000 (13,8)		3.6 (91,4)		6 (2,72)	
	2500 (17,2)		3.9 (99,1)		7.5 (3,40)	
	3000 (20,7)		4.2 (106,7)		9.5 (4,31)	
2 7/8	4000 (27,6)		4.7 (119,4)		13 (5,90)	
	1250 (8,6)	5.75 (146,1)	3.9 (99,1)	2.88 (73,0)	6.5 (2,95)	
	2000 (13,8)		4.3 (109,2)		8 (3,63)	
	2500 (17,2)		4.6 (116,8)		10 (4,54)	
3 1/2	3000 (20,7)		5.0 (127,0)		12 (5,44)	
	4000 (27,6)		5.8 (147,3)		15 (6,80)	
	1250 (8,6)	6.50 (165,1)	4.7 (119,4)	3.13 (79,4)	8 (3,63)	
	2000 (13,8)		5.2 (132,1)		12.5 (5,67)	
3 3/4	2500 (17,2)		5.6 (142,2)		17 (7,71)	
	3000 (20,7)		6.0 (152,4)		28 (12,7)	
	4000 (27,6)		7.0 (177,8)		40 (18,14)	
	1250 (8,6)	8.00 (203,2)	5.9 (149,9)	3.50 (88,9)	20 (9,07)	
4 1/2	2000 (13,8)		6.7 (170,2)		29 (13,15)	
	2500 (17,2)		7.2 (182,9)		37 (16,78)	
	3000 (20,7)		7.7 (195,6)		35 (15,88)	
	4000 (27,6)		8.6 (218,4)		45 (20,41)	
5 1/2	800 (5,5)	10.00 (254,0)	6.3 (160,0)	4.38 (111,1)	28 (12,70)	
	1250 (8,6)		6.8 (172,7)		36 (16,33)	
	2000 (13,8)		7.7 (195,6)		40 (18,14)	
	3000 (20,7)		8.8 (223,5)		52 (23,59)	
6 3/8	4000 (27,6)		9.9 (251,5)		70 (31,75)	
	800 (5,5)	8.75 (222,3)	7.6 (193,0)	3.88 (98,4)	30 (13,61)	
	1000 (6,9)		7.9 (200,7)		33 (14,97)	
	1250 (8,6)		8.2 (208,3)		40 (18,14)	
6 1/2	1500 (10,3)		8.6 (218,4)		45 (20,41)	
	2000 (13,8)		9.2 (233,7)		67 (30,39)	
	800 (5,5)	9.75 (247,7)	8.1 (205,7)	4.50 (114,3)	38 (17,24)	
	1250 (8,6)		8.7 (221,0)		48 (21,77)	
7	2000 (13,8)		9.8 (248,9)		57 (25,85)	
	2500 (17,2)		10.5 (266,7)		67 (30,39)	
	800 (5,5)	10.00 (254,0)	9.9 (251,5)	4.5 (114,3)	35 (15,88)	
	1000 (6,9)		10.2 (259,1)		40 (18,14)	
8 3/8	1250 (8,6)		10.7 (271,8)		47 (21,32)	
	1500 (10,3)		11.1 (281,9)		57 (25,85)	
	2000 (13,8)		12.0 (304,8)		73 (33,11)	
	1500 (10,3)	11.75 (298,5)	12.3 (311,2)	4.75 (120,7)	75 (34,02)	
9 5/8	2000 (13,8)		13.3 (337,8)		85 (38,56)	

90° Elbow
Female x Female
(continued)




Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	Wt	
	psi	(MPa)				Lbs	(kg)
8SS	800	(5,5)	10.50 (266,7)	10.0	4.75 (120,7)	37	(16,78)
	1000	(6,9)		10.3		(20,41)	
	1250	(8,6)		10.8		(20,41)	
10SS	500	(3,4)	10.00 (254,0)	12.6	5.40 (137,2)	62	(28,12)
	800	(5,5)		13.3		(34,02)	
	1000	(6,9)		13.8		(39,46)	
	1250	(8,6)		14.4		(47,63)	
12SS	500	(3,4)	13.25 (336,6)	14.6	6.10 (154,9)	74	(33,57)
	800	(5,5)		15.4		(43,09)	
	1000	(6,9)		16.0		(47,17)	
	1250	(8,6)		16.6		(56,7)	

45° Elbow
Female x Female




Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	Wt	
	psi	(MPa)				Lbs	(kg)
1.90	2000	(13,8)	3.125 (79,4)	2.9	2.06 (52,4)	3.5	(1,59)
	2500	(17,2)		3.1		(1,81)	
	3000	(20,7)		3.3		(2,27)	
	4000	(27,6)		3.7		(2,72)	
2 3/8	1250	(8,6)	4.250 (108,0)	3.2	2.56 (65,1)	3.5	(1,59)
	2000	(13,8)		3.6		(2,27)	
	2500	(17,2)		3.8		(2,81)	
	3000	(20,7)		4.0		(3,40)	
	4000	(27,6)		4.5		(4,99)	
2 7/8	1250	(8,6)	4.625 (117,5)	3.8	2.88 (73,0)	6	(2,72)
	2000	(13,8)		4.2		(3,18)	
	2500	(17,2)		4.5		(4,08)	
	3000	(20,7)		4.8		(4,99)	
	4000	(27,6)		5.4		(5,44)	
3 1/2	1250	(8,6)	5.00 (127,0)	4.6	3.13 (79,4)	8	(3,63)
	2000	(13,8)		5.1		(5,90)	
	2500	(17,2)		5.5		(6,80)	
	3000	(20,7)		5.8		(11,34)	
	4000	(27,6)		6.6		(17,24)	
4 1/2	1250	(8,6)	6.00 (152,4)	5.8	3.50 (88,9)	16	(7,26)
	2000	(13,8)		6.5		(9,53)	
	2500	(17,2)		7.0		(11,34)	
	3000	(20,7)		7.5		(13,61)	
	4000	(27,6)		8.3		(18,14)	

45° Elbow
Female x Female
(continued)




Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	Wt	
	psi	(MPa)				Lbs	(kg)
5 ½	800	(5,5)	8.25 (209,6)	6.2 (157,6)	4.38 (111,1)	22	(9,98)
	1250	(8,6)				30	(13,61)
	2000	(13,8)				34	(15,42)
	2500	(17,2)				40	(18,14)
	3000	(20,7)				50	(22,68)
	4000	(27,6)				65	(29,48)
6 ⅝	800	(5,5)	6.625 (168,3)	7.6 (193,0)	3.88 (98,4)	25	(11,34)
	1000	(6,9)				28	(12,70)
	1250	(8,6)				34	(15,42)
	1500	(10,3)				38	(17,24)
	2000	(13,8)				43	(19,50)
7	800	(5,5)	7.625 (193,7)	8.0 (203,2)	4.50 (114,3)	32	(14,51)
	1250	(8,6)				30	(13,61)
	2000	(13,8)				42	(19,05)
	2500	(17,2)				55	(24,95)
8 ⅝	800	(5,5)	7.250 (184,2)	9.9 (251,5)	4.50 (114,3)	33	(14,97)
	1000	(6,9)				37	(16,78)
	1250	(8,6)				45	(20,41)
	1500	(10,3)				50	(22,68)
	2000	(13,8)				67	(30,39)
9 ⅝	1500	(10,3)	7.375 (187,3)	12.3 (312,4)	4.75 (120,7)	62	(28,12)
	2000	(13,8)				80	(36,29)
8SS	800	(5,5)	8.75 (222,25)	10.0 (254,0)	4.75 (120,7)	34	(15,42)
	1000	(6,9)				42	(19,05)
	1250	(8,6)				48	(21,77)
10SS	500	(3,4)	10.0 (254,0)	12.4 (315,0)	5.40 (137,2)	38	(17,24)
	800	(5,5)				51	(23,13)
	1000	(6,9)				75	(34,02)
	1250	(8,6)				100	(45,36)
12SS	500	(3,4)	11.5 (292,1)	14.6 (370,8)	6.10 (154,9)	55	(24,95)
	800	(5,5)				66	(29,94)
	1000	(6,9)				114	(51,71)
	1250	(8,6)				129	(58,51)

30° Elbow
Female x Female




Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	Wt	
	psi	(MPa)				Lbs	(kg)
2 ⅝	1250	(8,6)	4.25 (108,0)	3.2 (81,3)	2.56 (65,1)	3.5	(1,59)
	2000	(13,8)				4.5	(2,04)
	2500	(17,2)				6	(2,72)
	3000	(20,7)				8	(3,63)
	4000	(27,6)				9	(4,08)
8 ⅝	800	(5,5)	7.250 (184,2)	9.9 (251,5)	4.50 (114,3)	22	(9,98)
	1000	(6,9)				28	(12,70)
	1250	(8,6)				34	(15,42)
	1500	(10,3)				44	(19,96)
9 ⅝	1500	(10,3)	7.375 (187,3)	12.1 (307,3)	4.75 (120,7)	53	(24,04)
	2000	(13,8)				61	(27,66)

22.5° Elbow
Female x Female




Thread Size Inches	Pressure Rating psi (MPa)	A		B		X ₁ (mm)	Wt Lbs (kg)
		In	(mm)	In	(mm)		
2 3/8	1250 (8,6)	4.000	(101,6)	3.2	(81,3)	2.56 (68,3)	3 (1,36)
	2000 (13,8)			3.5	(88,9)		4 (1,81)
	2500 (17,2)			3.8	(96,5)		5 (2,27)
	3000 (20,7)			4.0	(101,6)		7 (3,18)
	4000 (27,6)			4.5	(114,3)		8.5 (3,86)
3 1/2	1250 (8,6)	4.500	(114,3)	4.6	(116,8)	3.13 (79,4)	5.5 (2,49)
	2000 (13,8)			5.1	(129,5)		9 (4,08)
	2500 (17,2)			5.4	(137,2)		11 (4,99)
	3000 (20,7)			5.7	(144,8)		13.5 (6,12)
	4000 (27,6)			6.4	(162,5)		19 (8,62)
4 1/2	1250 (8,6)	5.000	(127,0)	5.8	(147,3)	3.50 (88,9)	10 (4,54)
	2000 (13,8)			6.4	(162,6)		16.5 (7,48)
	2500 (17,2)			6.8	(172,7)		21 (9,53)
	3000 (20,7)			7.3	(185,4)		25.5 (11,57)
	4000 (27,6)			8.1	(205,7)		36.5 (16,56)
5 1/2	800 (5,5)	8.250	(209,6)	6.2	(157,5)	4.38 (111,1)	9 (4,08)
	1250 (8,6)			6.6	(167,6)		13.5 (6,12)
	2000 (13,8)			7.4	(188,0)		23.4 (10,61)
	3000 (20,7)			8.4	(213,4)		36.5 (16,56)
	4000 (27,6)			9.3	(236,2)		52 (23,59)
6 5/8	800 (5,5)	5.75	(146,1)	7.5	(190,5)	3.88 (98,4)	11 (4,99)
	1000 (6,9)			7.8	(198,1)		15 (6,80)
	1250 (8,6)			8.0	(203,2)		18 (8,16)
	2000 (13,8)			8.9	(226,1)		30 (13,61)
7	1250 (8,6)	6.50	(165,1)	8.5	(215,9)	4.50 (114,3)	21 (9,53)
	2000 (13,8)			9.5	(241,3)		36.5 (16,56)
	2500 (17,2)			10.1	(256,5)		47.5 (21,55)
8 5/8	800 (5,5)	5.875	(149,2)	9.8	(248,9)	4.50 (114,3)	20 (9,07)
	1000 (6,9)			10.1	(256,9)		26 (11,79)
	1250 (8,6)			10.5	(266,7)		32 (14,51)
	1500 (10,3)			10.9	(276,9)		40 (18,14)
9 5/8	1500 (10,3)	7.375	(187,3)	12.1	(307,3)	4.75 (120,7)	50 (22,68)
	2000 (13,8)			13.0	(330,2)		60.5 (27,44)
8SS	800 (5,5)	8.75	(222,25)	9.8	(249,0)	4.75 (120,7)	30 (13,60)
	1000 (6,9)			10.2	(259,1)		38 (17,24)
	1250 (8,5)			10.5	(266,7)		42 (19,05)
10SS	500 (3,4)	8.187	(208,0)	12.5	(317,5)	5.40 (137,2)	25.5 (11,57)
	800 (5,5)			13.0	(330,2)		43 (19,5)
	1000 (6,9)			13.5	(342,9)		50 (22,68)
	1250 (8,6)			14.1	(358,1)		60 (27,22)
12SS	500 (3,4)	11.375	(288,9)	14.5	(368,3)	6.10 (154,9)	30.5 (13,83)
	800 (5,5)			15.1	(383,5)		45.8 (20,77)
	1000 (6,9)			15.7	(398,8)		63.2 (28,66)
	1250 (8,6)			16.3	(414,0)		70 (31,75)

11.25° Elbow
Female x Female

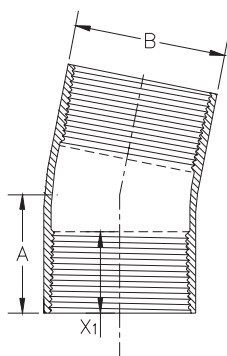


Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	Wt Lbs (kg)
2 3/8	1250 (8,6)	5.500 (139,7)	3.2 (81,3)	2.56 (65,1)	3 (1,36)
	2000 (13,8)		3.5 (88,9)		4 (1,81)
	2500 (17,2)		3.8 (96,5)		5 (2,27)
	3000 (20,7)		4.0 (101,6)		7 (10,4)
	4000 (27,6)		4.5 (114,3)		8.5 (12,7)
3 1/2	1250 (8,6)	6.000 (152,4)	4.5 (114,3)	3.13 (79,4)	5 (2,27)
	2000 (13,8)		5.0 (127,0)		8 (3,63)
	2500 (17,2)		5.3 (134,6)		10 (4,54)
	3000 (20,7)		5.7 (144,8)		12 (5,44)
	4000 (27,6)		6.3 (160,0)		17 (7,71)
4 1/2	1250 (8,6)	8.250 (209,6)	5.7 (144,8)	4.38 (111,1)	9 (4,08)
	2000 (13,8)		6.4 (162,6)		15 (6,80)
	2500 (17,2)		6.8 (172,7)		19 (8,62)
	3000 (20,7)		7.2 (182,9)		23 (10,43)
	4000 (27,6)		8.1 (205,7)		33 (14,97)
5 1/2	800 (5,5)	7.625 (193,7)	6.2 (157,5)	4.75 (120,7)	8 (3,63)
	1250 (8,6)		6.6 (167,6)		12 (5,44)
	2000 (13,8)		7.3 (185,4)		21 (9,53)
	3000 (20,7)		8.3 (210,8)		33 (14,97)
	4000 (27,6)		9.3 (236,2)		47 (21,32)
6 SSSHP	800 (5,5)	6.625 (168,3)	7.5 (190,5)	3.88 (98,4)	10 (4,54)
	1000 (6,9)		7.7 (195,6)		13 (5,90)
	1500 (10,3)		8.4 (213,4)		18 (8,16)
6 5/8	800 (5,5)	7.625 (193,7)	7.5 (190,5)	4.50 (114,3)	10 (4,54)
	1000 (6,9)		7.7 (195,6)		13 (19,3)
	1250 (8,6)		8.0 (203,2)		16 (7,26)
	2000 (13,8)		8.9 (226,1)		27 (12,25)
7	1250 (8,6)	7.250 (184,2)	8.5 (215,9)	4.50 (114,3)	19 (8,62)
	2000 (13,8)		9.4 (238,8)		33 (14,97)
	2500 (17,2)		10.0 (254,0)		43 (19,50)
8 5/8	800 (5,5)	7.625 (193,7)	9.8 (248,9)	4.50 (114,3)	18 (8,16)
	1000 (6,9)		10.1 (256,5)		24 (10,89)
	1250 (8,6)		10.5 (266,7)		29 (13,15)
	1500 (10,3)		10.8 (274,3)		36 (16,33)

11.25° Elbow
Female x Female
(continued)

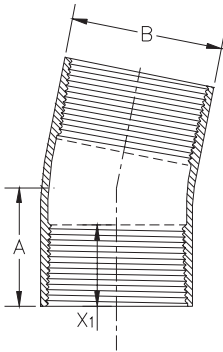


Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	Wt Lbs (kg)
9 5/8	1500 (10,3)	7.375 (187,3)	12.1 (307,3)	4.75 (120,7)	39 (17,69)
	2000 (13,8)		13.0 (330,2)		55 (24,95)
8SS	800 (5,5)	8.75 (222,25)	9.8 (248,9)	4.75 (120,7)	27 (12,24)
	1000 (6,9)		10.1 (256,5)		35 (15,87)
	1250 (8,6)		10.5 (248,9)		35 (15,88)
10SS	500 (3,4)	8.186 (208,0)	12.5 (317,5)	5.40 (137,2)	22 (9,98)
	800 (5,5)		13.2 (335,3)		39 (17,69)
	1000 (6,9)		13.5 (342,9)		46 (20,87)
	1250 (8,6)		14.0 (355,6)		58 (26,31)
12SS	500 (3,4)	11.25 (285,8)	14.4 (365,8)	6.10 (154,9)	38 (17,24)
	800 (5,5)		15.2 (386,1)		66 (29,94)
	1000 (6,9)		15.6 (396,2)		83 (37,65)
	1250 (8,6)		16.2 (411,48)		106 (48,08)

Tee
Female x Female



Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	Wt Lbs (kg)
1.90	2000 (13,8)	4.375 (111,1)	4.875 (123,8)	3.0 (76,2)	2.06 (52,4)	5.5 (2,49)
	2500 (17,2)			3.2 (81,3)		6.5 (2,95)
	3000 (20,7)			3.4 (86,4)		7.5 (3,40)
	4000 (27,6)			3.9 (99,1)		10 (4,54)
2 3/8	1250 (8,6)	5.250 (133,4)	5.75 (146,1)	3.3 (83,8)	2.56 (65,1)	8 (3,63)
	2000 (13,8)			3.7 (94,0)		10 (4,54)
	2500 (17,2)			4.0 (101,6)		11 (4,99)
	3000 (20,7)			4.2 (106,7)		12 (5,44)
	4000 (27,6)			4.8 (121,9)		17 (7,71)
2 7/8	1250 (8,6)	5.75 (146,4)	6.50 (165,1)	3.9 (99,1)	2.88 (73,0)	10 (4,54)
	2000 (13,8)			4.4 (111,8)		12 (5,44)
	2500 (17,2)			4.8 (121,9)		14 (6,35)
	3000 (20,7)			5.2 (132,1)		18 (8,16)
	4000 (27,6)			5.9 (149,9)		28 (12,7)
3 1/2	1250 (8,6)	6.50 (165,1)	7.25 (184,2)	4.8 (121,9)	3.13 (79,4)	14 (6,35)
	2000 (13,8)			5.4 (137,2)		21 (9,53)
	2500 (17,2)			5.9 (149,9)		26 (11,79)
	3000 (20,7)			6.3 (160,0)		50 (22,68)
	4000 (27,6)			7.2 (182,9)		65 (29,48)
4 1/2	1250 (6,9)	7.50 (190,5)	8.25 (209,6)	6.0 (152,4)	3.50 (88,9)	25 (11,34)
	2000 (13,8)			6.8 (172,7)		39 (17,69)
	2500 (17,2)			7.3 (185,4)		48 (21,77)
	3000 (20,7)			7.9 (200,7)		75 (34,02)
	4000 (27,6)			8.9 (226,1)		85 (38,56)
5 1/2	800 (5,5)	9.00 (228,6)	9.75 (247,7)	6.4 (162,7)	4.38 (111,1)	32 (14,51)
	1250 (8,6)			6.9 (175,3)		43 (19,5)
	2000 (13,8)			7.8 (198,1)		70 (31,75)
	3000 (20,7)			9.1 (231,1)		100 (45,36)
	4000 (27,6)			10.2 (259,1)		115 (52,16)

Tee
Female x Female
(continued)




Thread Size Inches	Pressure Rating psi (MPa)	A		B		C		X ₁ In (mm)	Wt Lbs (kg)	
		In	(mm)	In	(mm)	In	(mm)			
6 5/8	800 (5,5)	8.50	(215,9)	9.25	(235,0)	7.7	(195,6)	3.88	(98,4)	36 (16,33)
	1000 (6,9)					8.0	(203,2)			42 (19,05)
	1250 (8,6)					8.4	(213,4)			60 (27,22)
	1500 (10,3)					8.7	(221,0)			70 (31,75)
	2000 (13,8)					9.5	(241,3)			80 (36,29)
7	800 (5,5)	9.75	(247,7)	10.5	(266,7)	8.2	(208,3)	4.50	(114,3)	45 (20,41)
	1250 (8,6)					8.9	(226,1)			65 (29,48)
	2000 (13,8)					10.1	(255,3)			75 (34,02)
	2500 (17,2)					10.9	(275,6)			100 (45,36)
8 5/8	800 (5,5)	10.00	(254,0)	10.75	(273,1)	10.1	(261,6)	4.50	(114,3)	50 (22,68)
	1000 (6,9)					10.5	(266,7)			60 (27,22)
	1250 (8,6)					10.9	(276,9)			70 (31,75)
	1500 (10,3)					11.4	(289,6)			95 (43,09)
	2000 (13,8)					12.0	(304,8)			100 (45,36)
9 5/8	1500 (10,3)	10.50	(266,7)	11.25	(285,8)	12.7	(322,6)	4.75	(120,7)	95 (43,1)
	2000 (13,8)					13.7	(348,0)			110 (49,9)
8SS	800 (5,5)	11.5	(292,1)	12.5	(317,5)	10.1	(256,5)	4.75	(120,7)	50 (22,7)
	1000 (6,9)					10.5	(266,7)			65 (19,5)
	1250 (8,6)					10.9	(276,9)			65 (19,5)
10SS	500 (3,4)	12.0	(304,8)	12.75	(323,9)	12.7	(322,6)	5.40	(137,2)	76 (34,5)
	800 (5,5)					13.5	(342,9)			90 (40,8)
	1000 (6,9)					14.0	(355,6)			122 (55,3)
	1250 (8,6)					14.6	(370,8)			160 (72,6)
12SS	500 (3,4)	14.75	(374,7)	14.75	(374,7)	14.8	(375,9)	6.10	(154,9)	102 (46,3)
	800 (5,5)					15.6	(396,2)			145 (65,8)
	1000 (6,9)					16.2	(411,5)			210 (95,3)
	1250 (8,6)					16.9	(429,3)			240 (108,9)

Threaded Nipples*

Male x Male

* ALIPHATIC AMINE
CURED EPOXY
PRODUCTS
ONLY




Thread Size Inches	B Nominal Size In (mm)	Pressure psi (MPa)	X ₁ In (mm)	A - Standard Lengths Ft. (m)		
				1 (.305)	1.5 (.457)	2 (.610)
				Weight Lbs (KGS)		
1.90	1.44 (36,6)	4000 (27,6)	2.06 (52,4)	1.7 (0,77)	2.5 (1,13)	3.4 (1,54)
2 3/8	1.94 (49,3)	4000 (27,6)	2.56 (65,1)	2.0 (0,91)	3.1 (1,41)	4.1 (1,86)
2 7/8	2.37 (60,2)	3500 (24,1)	2.88 (73,0)	2.8 (1,27)	4.1 (1,86)	5.5 (2,49)
3 1/2	2.37 (60,2)	4000 (27,6)	3.13 (79,4)	5.8 (2,63)	8.6 (3,90)	11.5 (5,22)
3 1/2	2.94 (74,7)	3000 (20,7)	3.13 (79,4)	3.6 (1,63)	5.4 (2,45)	7.2 (3,27)
4	3.33 (85,6)	3000 (20,7)	3.88 (98,4)	---	---	9.4 (4,26)
4 1/2	2.94 (74,7)	4000 (27,6)	3.50 (88,9)	---	14.7 (6,67)	19.6 (8,89)
4 1/2	3.33 (84,6)	4000 (27,6)	3.50 (88,9)	---	12.1 (5,49)	16.1 (7,30)
4 1/2	3.85 (97,8)	2500 (17,2)	3.50 (88,9)	---	7.7 (3,49)	10.3 (4,67)
5 1/2	3.85 (97,8)	4000 (27,6)	4.38 (111,1)	---	15.6 (7,08)	20.8 (9,43)
5 1/2	4.74 (120,4)	2000 (13,8)	4.38 (111,1)	---	8.3 (3,76)	11.1 (5,03)
6 5/8	5.50 (139,7)	2250 (15,5)	3.88 (98,4)	---	13.8 (6,26)	18.4 (8,35)
6 5/8	5.93 (150,6)	1000 (6,9)	3.88 (98,4)	---	11.2 (5,08)	14.9 (6,76)
7	5.50 (139,7)	2500 (17,2)	4.50 (114,3)	---	20.7 (9,39)	27.6 (12,52)
7	5.93 (150,6)	2000 (13,8)	4.50 (114,3)	---	14.4 (6,53)	19.2 (8,71)
8 5/8	5.93 (150,6)	2000 (13,8)	4.50 (114,3)	---	---	19.4 (8,80)
8 5/8	7.74 (196,6)	1250 (8,6)	4.50 (114,3)	---	---	19.4 (8,80)
9 5/8	7.74 (196,6)	2000 (13,8)	4.75 (120,7)	---	---	42.5 (19,28)
8SS	7.74 (196,6)	1250 (8,6)	4.75 (120,7)	---	20.2 (6,17)	27.0 (8,23)
10SS	9.84 (249,9)	1250 (8,6)	5.40 (137,2)	---	30.5 (9,27)	40.6 (12,37)
12SS	11.81 (300,0)	1250 (8,6)	6.10 (154,9)	---	---	51.5 (53,4)

Threaded Nipples*

Male x Male


* ALIPHATIC AMINE
CURED EPOXY
PRODUCTS
ONLY



Thread Size Inches	B Nominal Size In (mm)	Pressure psi (MPa)	A - Standard Lengths Ft. (m)					Repair Nipples
			3 (.914)	4 (1.219)	6 (1.829)	8 (2.438)	10 (3.048)	
Weight Lbs (KGS)								
1.90	1.44 (36,6)	4000 (27,6)	5.1 (2,31)	6.8 (3,08)	10.1 (4,58)	13.5 (6,12)	16.9 (7,67)	49.5 (22,5)
2 3/8	1.94 (49,3)	4000 (27,6)	6.1 (2,77)	8.2 (3,72)	12.2 (5,53)	16.3 (7,39)	20.4 (9,25)	60.5 (27,4)
2 7/8	2.37 (60,2)	3500 (24,1)	8.3 (3,76)	11.0 (4,99)	16.5 (7,48)	22.0 (9,98)	27.5 (12,47)	81.8 (37,1)
3 1/2	2.37 (60,2)	4000 (27,6)	17.3 (7,85)	23.0 (10,43)	34.5 (15,65)	46.0 (20,87)	57.5 (26,08)	168.9 (76,6)
3 1/2	2.94 (74,7)	3000 (20,7)	10.8 (4,90)	14.4 (6,53)	21.5 (9,75)	28.7 (13,02)	35.9 (16,28)	106.3 (48,2)
4	3.33 (85,6)	3000 (20,7)	14.1 (6,40)	18.8 (8,53)	28.3 (12,84)	37.7 (17,10)	47.1 (21,36)	140.8 (63,9)
4 1/2	2.94 (74,7)	4000 (27,6)	29.4 (13,34)	39.2 (17,78)	58.7 (26,63)	78.3 (35,52)	97.9 (44,41)	287.2 (130,3)
4 1/2	2.94 (74,7)	4000 (27,6)	24.2 (10,98)	32.2 (14,61)	48.4 (21,95)	64.5 (29,26)	80.6 (36,56)	238.2 (108,0)
4 1/2	3.33 (84,6)	2500 (17,2)	15.5 (7,03)	20.6 (9,34)	31.0 (14,06)	41.3 (18,73)	51.6 (23,41)	158.5 (71,9)
5 1/2	3.85 (97,8)	4000 (27,6)	31.2 (14,15)	41.6 (18,87)	62.4 (28,30)	83.2 (37,74)	104.0 (47,17)	317.1 (143,8)
5 1/2	4.74 (120,4)	2000 (13,8)	16.6 (7,53)	22.2 (10,07)	33.2 (15,06)	44.3 (20,09)	55.4 (25,13)	162.9 (73,9)
6 5/8	5.50 (139,7)	2250 (15,5)	27.6 (12,52)	36.8 (16,69)	55.2 (25,04)	73.6 (33,38)	92.0 (41,73)	273.2 (123,9)
6 5/8	5.93 (150,6)	1000 (6,9)	22.4 (10,16)	29.8 (13,52)	44.7 (20,28)	59.6 (27,03)	74.5 (33,79)	185.1 (84,0)
7	5.50 (139,7)	2500 (17,2)	41.5 (18,82)	55.3 (25,08)	82.9 (37,60)	96.7 (43,86)	138.2 (62,69)	383.9 (174,1)
7	5.93 (150,6)	2000 (13,8)	28.8 (13,06)	38.4 (17,42)	57.6 (26,13)	76.8 (34,84)	96.0 (43,54)	283.2 (128,5)
8 5/8	7.43 (188,7)	2000 (13,8)	29.1 (13,20)	38.8 (17,60)	58.3 (26,44)	77.7 (35,24)	97.1 (44,04)	297.1 (134,8)
8 5/8	7.74 (196,6)	1250 (8,6)	29.1 (13,20)	38.8 (17,60)	58.3 (26,44)	77.7 (35,24)	97.1 (44,04)	297.1 (134,8)
9 5/8	7.74 (196,6)	2000 (13,8)	63.7 (28,89)	85.0 (38,56)	127.4 (57,79)	169.9 (77,07)	212.4 (96,34)	630.9 (286,2)
8SS	7.74 (196,6)	1250 (8,6)	40.4 (18,3)	53.9 (24,4)	80.9 (36,7)	107.8 (48,9)	134.8 (61,1)	395.1 (179,2)
10SS	9.84 (249,9)	1250 (8,6)	61.0 (27,7)	81.3 (36,9)	121.9 (55,3)	163.0 (73,9)	203.2 (92,2)	609.6 (276,5)
12SS	1.81 (300,0)	1250 (8,6)	74.9 (34,0)	99.8 (45,3)	149.7 (67,9)	199.6 (90,5)	249.5 (113,2)	745.9 (338,3)

Threaded Nipples* Male x Male


* ANHYDRIDE EPOXY
PRODUCTS ONLY



Thread Size Inches	B Nominal Size In (mm)	Pressure psi (MPa)	X ₁ In (mm)	A - Standard Lengths Ft. (m)		
				1 (.305)	1.5 (.457)	2 (.610)
Weight Lbs (KGS)						
1 1/2	1.50 (38,1)	3000 (20,7)	2.06 (52,4)	1.3 (0,59)	1.9 (0,89)	2.6 (1,18)
2 3/8	2.00 (50,8)	3000 (20,7)	2.56 (65,1)	1.6 (0,73)	2.4 (1,10)	3.2 (1,46)
2 7/8	2.43 (61,7)	3000 (20,7)	2.88 (73,0)	2.2 (0,99)	3.3 (1,48)	4.4 (1,98)
3 1/2	3.00 (76,2)	2900 (20,7)	3.13 (79,4)	2.9 (1,32)	4.4 (1,98)	5.8 (2,64)
4 1/2	3.91 (99,3)	2500 (17,2)	3.50 (88,9)	3.9 (1,77)	5.8 (2,66)	7.8 (3,54)
4 1/2	3.75 (95,3)	3000 (19,3)	3.50 (88,9)	5.1 (2,31)	7.6 (3,47)	10.2 (4,62)
5 1/2	4.74 (120,4)	2000 (13,8)	4.38 (98,4)	---	8.3 (3,76)	11.1 (5,03)
6 5/8	5.85 (148,6)	1500 (10,3)	3.88 (98,4)	---	8.7 (3,95)	11.6 (5,26)
6 5/8	5.50 (139,7)	2000 (13,8)	3.88 (98,4)	---	8.8 (4,01)	11.8 (5,35)
8 5/8	7.50 (196,6)	2000 (13,7)	4.50 (114,3)	---	---	23.4 (10,6)

Threaded Nipples* Male x Male

* AROMATIC AMINE
PRODUCTS ONLY



Thread Size Inches	B Nominal Size In (mm)	Pressure psi (MPa)	X ₁ In (mm)	A - Standard Lengths Ft. (m)		
				1 (.305)	1.5 (.457)	2 (.610)
Weight Lbs (KGS)						
1 1/2	1.50 (38,1)	2500 (19,0)	2.06 (52,4)	1.3 (0,6)	1.9 (0,6)	2.6 (1,2)
2 3/8	2.00 (50,8)	2250 (19,0)	2.56 (65,1)	1.6 (0,7)	2.4 (1,1)	3.2 (1,5)
2 7/8	2.43 (61,7)	2000 (17,2)	2.88 (73,0)	2.2 (1,0)	3.3 (1,5)	4.4 (2,0)
3 1/2	3.00 (76,2)	2000 (17,2)	3.13 (79,4)	2.9 (1,3)	4.4 (2,0)	5.8 (2,6)
4 1/2	3.91 (76,2)	1750 (15,5)	3.50 (88,9)	3.9 (1,8)	5.8 (2,7)	7.8 (3,5)
4 1/2	3.75 (95,2)	2250 (15,5)	3.50 (88,9)	3.9 (1,77)	5.8 (2,66)	7.8 (3,54)
5 1/2	4.74 (120,4)	1500 (10,3)	4.38 (111,1)	---	8.3 (3,76)	11.1 (5,03)
6 5/8	5.85 (139,7)	1000 (10,3)	3.88 (98,4)	---	8.7 (4,0)	11.6 (5,3)
6 5/8	5.50 (139,7)	1750 (12,1)	3.88 (98,4)	---	8.8 (4,01)	11.8 (5,35)
8 5/8	7.50 (196,6)	1250 (10,3)	4.50 (114,3)	---	---	23.4 (10,6)

Threaded Nipples* Male x Male

***ANHYDRIDE EPOXY PRODUCTS ONLY**


Thread Size Inches	B Nominal Size In (mm)	Pressure psi (MPa)	A - Standard Lengths Ft. (m)					Repair Nipples
			3 (.914)	4 (1.219)	6 (1.829)	8 (2.438)	10 (3.048)	
Weight Lbs (KGS)								
1 1/2	1.50 (38,1)	3000 (20,7)	3.9 (1,78)	5.2 (2,36)	7.8 (3,56)	10.4 (4,72)	13.0 (5,9)	14.7 (18,9)
2 3/8	2.00 (50,8)	3000 (20,7)	4.8 (2,19)	6.4 (2,92)	9.6 (4,38)	12.8 (5,84)	16.0 (7,3)	52.8 (23,9)
2 7/8	2.43 (61,7)	3000 (20,7)	6.6 (2,96)	8.8 (3,96)	13.2 (5,92)	17.6 (7,92)	22.0 (9,9)	83.8 (38,0)
3 1/2	3.00 (76,2)	2900 (20,7)	8.7 (3,96)	11.6 (5,28)	17.4 (7,92)	23.2 (10,6)	29.0 (13,2)	109.4 (49,6)
4 1/2	3.91 (99,3)	2500 (17,2)	11.7 (5,31)	15.6 (7,08)	23.4 (10,6)	31.2 (14,2)	39.0 (17,7)	158.4 (71,8)
4 1/2	3.75 (95,3)	3000 (19,3)	15.3 (6,94)	20.4 (9,24)	30.6 (13,8)	40.8 (18,5)	51.0 (23,1)	173.1 (78,5)
5 1/2	4.74 (120,4)	2000 (13,8)	16.6 (7,53)	22.2 (10,07)	33.2 (15,06)	44.3 (20,09)	55.4 (25,13)	198.4 (89,9)
6 5/8	5.85 (148,6)	1500 (10,3)	17.7 (8,03)	23.2 (10,5)	34.8 (15,8)	46.4 (21,0)	58.0 (26,3)	252.8 (114,7)
6 5/8	5.50 (139,7)	2000 (13,8)	17.7 (8,03)	23.6 (10,7)	35.3 (16,0)	47.1 (21,4)	58.9 (26,7)	295.7 (134,1)
8 5/8	7.50 (196,6)	2000 (13,7)	35.2 (15,9)	46.8 (21,2)	70.4 (31,9)	93.6 (42,5)	117.0 (79,7)	450.6 (204,4)

Threaded Nipples* Male x Male

***AROMATIC AMINE PRODUCTS ONLY**

Thread Size Inches	B Nominal Size In (mm)	Pressure psi (MPa)	A - Standard Lengths Ft. (m)					Repair Nipples
			3 (.914)	4 (1.219)	6 (1.829)	8 (2.438)	10 (3.048)	
Weight Lbs (KGS)								
1 1/2	1.50 (38,1)	2500 (19,0)	3.9 (1,8)	5.2 (2,4)	7.8 (3,6)	10.4 (4,7)	13.0 (5,9)	44.4 (20,1)
2 3/8	2.00 (50,8)	2250 (19,0)	4.8 (2,2)	6.4 (2,9)	9.6 (4,4)	12.8 (5,8)	16.0 (7,3)	61.1 (27,7)
2 7/8	2.43 (61,7)	2000 (17,2)	6.6 (3,0)	8.8 (4,0)	13.2 (5,9)	17.6 (7,9)	22.0 (9,9)	85.8 (38,9)
3 1/2	3.00 (76,2)	2000 (17,2)	8.7 (4,0)	11.6 (5,3)	17.4 (7,9)	23.2 (10,6)	29.0 (13,2)	113.5 (51,4)
4 1/2	3.91 (76,2)	1750 (15,5)	11.7 (5,3)	15.6 (7,1)	23.4 (10,6)	31.2 (14,2)	39.0 (17,7)	173.0 (78,5)
4 1/2	3.75 (95,2)	2250 (15,5)	15.3 (6,94)	20.4 (9,24)	30.6 (13,8)	40.8 (18,5)	51.0 (23,1)	174.0 (78,9)
5 1/2	4.74 (120,4)	1500 (10,3)	16.6 (7,53)	22.2 (10,07)	33.2 (15,06)	44.3 (20,09)	55.4 (25,13)	213.1 (96,6)
6 5/8	5.85 (139,7)	1000 (10,3)	17.4 (7,9)	23.2 (10,5)	34.8 (15,8)	46.4 (21,0)	58.0 (26,3)	223.7 (104,4)
6 5/8	5.50 (139,7)	1750 (12,1)	17.7 (8,03)	23.6 (10,7)	35.3 (16,0)	47.1 (21,4)	58.9 (26,7)	313.6 (142,2)
8 5/8	7.50 (196,6)	1250 (10,3)	35.2 (15,9)	46.8 (21,2)	70.4 (31,9)	93.6 (42,5)	117.0 (79,76)	403.8 (183,1)

Flanges⁽²⁾ Female

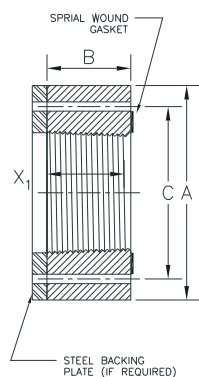


Thread Size In	Pressure Rating	Pressure Rating	A	B	C	X ₁ In (mm)	No. of Bolts	Bolt ⁽¹⁾ Size Length In (mm)	Bolt Hole Size In (mm)	Wt Lbs (kg)
	psi (MPa) 100°F	psi (MPa) 200°F	Flange O.D. In (mm)	Flange Width In (mm)	Flange Bolt Circle In (mm)					
ANSI 150										
2 3/8	285 (1,9)	260 (1,8)	6.0 (152,4)	3.06 (77,7)	4.75 (120,7)	2.53 (64,3)	4	.625 x 10 (15,9 x 254,0)	.750 (19,1)	4.6 (2,09)
2 7/8	285 (1,9)	260 (1,8)	7.0 (177,8)	3.38 (85,9)	5.50 (139,7)	2.88 (73,0)	4	.625 x 12 (15,9 x 304,8)	.750 (19,1)	7 (3,18)
3 1/2	285 (1,9)	260 (1,8)	7.5 (190,5)	3.63 (92,2)	6.00 (152,4)	3.13 (79,4)	4	.625 x 10 (15,9 x 254,0)	.750 (19,1)	8.1 (3,67)
4 1/2	285 (1,9)	260 (1,8)	9.0 (228,6)	4.00 (101,6)	7.50 (190,5)	3.50 (88,9)	8	.625 x 14 (15,9 x 355,6)	.750 (19,1)	12.0 (5,44)
6 5/8	285 (1,9)	260 (1,8)	11.0 (279,4)	4.375 (111,1)	9.50 (241,3)	3.88 (98,4)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	17.5 (7,94)
7	285 (1,9)	260 (1,8)	11.0 (279,4)	5.00 (127,0)	9.50 (241,3)	4.50 (114,3)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	18.4 (8,35)
8 5/8	285 (1,9)	260 (1,8)	13.5 (342,9)	5.00 (127,0)	11.75 (298,5)	4.50 (114,3)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	28.5 (12,93)
9 5/8	285 (1,9)	260 (1,8)	13.5 (342,9)	5.25 (133,4)	11.75 (298,5)	4.75 (120,7)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	24.8 (11,25)
8SS	285 (1,9)	260 (1,8)	13.5 (342,9)	5.00 (127,0)	11.75 (298,5)	4.75 (120,7)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	28.2 (12,79)
10SS	285 (1,9)	260 (1,8)	16.0 (406,4)	5.75 (146,1)	14.25 (362,0)	5.40 (137,2)	12	.875 x 15 (22,2 x 381,0)	1.00 (25,4)	37.2 (16,87)
12SS	285 (1,9)	260 (1,8)	19.0 (482,6)	6.43 (163,3)	17.0 (431,8)	6.10 (154,9)	12	.875 x 16 (22,2 x 381,0)	1.00 (25,4)	61.1 (27,71)
ANSI 300										
4 1/2	740 (5,1)	675 (4,7)	10.0 (254,0)	4.00 (101,6)	7.875 (200,0)	3.50 (88,9)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	15.8 (7,17)
5 1/2	740 (5,1)	675 (4,7)	11.0 (279,4)	4.88 (124,0)	9.25 (235,0)	4.38 (111,1)	8	.75 x 14 (19,1 x 355,6)	.875 (22,2)	22.6 (10,25)
6 5/8	740 (5,1)	675 (4,7)	12.5 (317,5)	4.375 (111,1)	10.625 (269,9)	3.88 (98,4)	12	.75 x 14 (19,1 x 355,6)	.875 (22,2)	25.2 (11,43)
7	740 (5,1)	675 (4,7)	12.5 (317,5)	5.00 (127,0)	10.625 (269,9)	4.50 (114,3)	12	.75 x 14 (19,1 x 355,6)	.875 (22,2)	27.2 (12,34)
8 5/8	740 (5,1)	675 (4,7)	15.0 (381,0)	5.00 (127,0)	13.00 (330,2)	4.50 (114,3)	12	.875 x 14 (22,2 x 355,6)	1.00 (25,4)	38.7 (17,55)
9 5/8	740 (5,1)	675 (4,7)	15.0 (381,0)	5.25 (133,4)	13.00 (330,2)	4.75 (120,7)	12	.875 x 14 (22,2 x 355,6)	1.00 (25,4)	35.4 (16,06)
8SS	740 (5,1)	675 (4,7)	15.0 (381,0)	5.00 (127,0)	13.00 (330,2)	4.75 (120,7)	12	.875 x 14 (22,2 x 355,6)	1.00 (25,4)	38.3 (17,375)
10SS	740 (5,1)	675 (4,7)	17.5 (444,5)	5.75 (146,1)	15.25 (387,4)	5.40 (137,2)	16	1 x 15 (25,4 x 381,0)	1.125 (28,6)	50.4 (22,86)
12SS	740 (5,1)	675 (4,7)	20.5 (520,7)	6.43 (163,3)	17.75 (450,9)	6.10 (154,9)	16	1.125 x 16 (28,6 x 406,4)	1.25 (31,8)	77.4 (35,10)

⁽¹⁾ Bolt lengths in table are for fiberglass-to-fiberglass flange connections. Fiberglass-to-steel bolt lengths are provided in INS8000.

⁽²⁾ Spiral wound gaskets (Flexitalic®) are required in all flange joints

Flanges⁽²⁾ Female (continued)

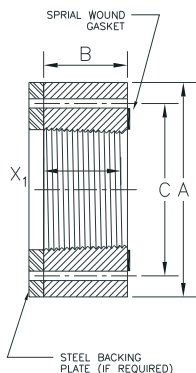

Thread Size In	Pressure Rating psi (MPa) 100°F	Pressure Rating psi (MPa) 200°F	A Flange O.D. In (mm)	B Flange Width In (mm)	C Bolt Circle In (mm)	X ₁ In (mm)	No. of Bolts	Bolt ⁽¹⁾ Size Length In (mm)	Bolt Hole Size In (mm)	Wt Lbs (kg)
ANSI 300/600⁽³⁾										
1.90	1480 (10,2)	1350 (9,3)	6.125 (155,6)	2.56 (66,0)	4.50 (114,3)	2.06 (52,4)	4	.75 x 10 (19,1 x 254,0)	.875 (22,2)	4.3 (1,95)
2 3/8	1480 (10,2)	1350 (9,3)	6.5 (165,1)	3.06 (77,7)	5.00 (127,0)	2.56 (65,1)	8	.625 x 10 (15,9 x 254,0)	.750 (19,1)	5.3 (2,40)
2 7/8	1480 (10,2)	1350 (9,3)	7.5 (190,5)	3.38 (85,9)	5.875 (149,2)	2.88 (73,0)	8	.75 x 12 (19,1 x 304,8)	.875 (22,2)	7.6 (3,45)
3 1/2	1480 (10,2)	1350 (9,3)	8.25 (209,6)	3.63 (92,2)	6.625 (168,3)	3.13 (79,4)	8	.75 x 10 (19,1 x 254,0)	.875 (22,2)	9.7 (4,40)
ANSI 600⁽³⁾										
4 1/2	1480 (10,2)	1350 (9,3)	10.75 (273,1)	4.00 (101,6)	8.50 (215,9)	3.50 (88,9)	8	.875 x 14 (22,2 x 355,6)	1.00 (25,4)	18.8 (8,53)
5 1/2	1480 (10,2)	1350 (9,3)	13.0 (330,2)	4.88 (124,0)	10.50 (266,7)	4.38 (111,1)	8	1 x 14 (25,4 x 355,6)	1.125 (28,6)	34.9 (15,83)
6 5/8	1480 (10,2)	1350 (9,3)	14.0 (355,6)	4.375 (111,1)	11.50 (292,1)	3.88 (98,4)	12	1 x 14 (25,4 x 355,6)	1.125 (28,6)	33.3 (15,10)
7	1480 (10,2)	1350 (9,3)	14.0 (355,6)	5.00 (127,0)	11.50 (292,1)	4.50 (114,3)	12	1 x 14 (25,4 x 355,6)	1.125 (28,6)	36.5 (16,56)
8 5/8	1480 (10,2)	1350 (9,3)	16.5 (419,1)	5.00 (127,0)	13.75 (349,3)	4.50 (114,3)	12	1.125 x 14 (28,6 x 355,6)	1.25 (31,8)	49.8 (22,59)
9 5/8	1480 (10,2)	1350 (9,3)	16.5 (419,1)	5.25 (133,4)	13.75 (349,3)	4.75 (120,7)	12	1.375 x 14 (34,9 x 355,6)	1.25 (31,8)	47.1 (21,36)
8SS	1480 (10,2)	1350 (9,3)	16.5 (419,1)	5.00 (127,0)	13.75 (349,3)	4.75 (120,7)	12	1.125 x 14 (28,6 x 355,6)	1.25 (31,8)	49.4 (22,41)
10SS	1480 (10,2)	1350 (9,3)	20.0 (508,0)	5.75 (146,1)	17.00 (431,8)	5.40 (137,2)	16	1.25 x 15 (31,8 x 381,0)	1.375 (34,9)	76.9 (34,88)
12SS	1480 (10,2)	1350 (9,3)	22.0 (558,8)	6.43 (163,3)	19.25 (489,0)	6.10 (154,9)	20	1.25 x 16 (28,6 x 406,4)	1.375 (34,9)	95.4 (43,27)
ANSI 900⁽³⁾										
3 1/2	2220 (15,3)	2025 (14,0)	9.5 (241,3)	3.63 (92,2)	7.50 (190,5)	3.13 (79,4)	8	.875 x 10 (22,2 x 254,0)	1.00 (25,4)	13.7 (6,21)
4 1/2	2220 (15,3)	2025 (14,0)	11.5 (292,1)	4.00 (101,6)	9.25 (235,0)	3.50 (88,9)	8	1.125 x 14 (28,6 x 355,6)	1.25 (31,8)	21.5 (7,75)
5 1/2 ⁽⁴⁾	2220 (15,3)	2025 (14,0)	13.75 (349,3)	4.88 (124,0)	11.00 (279,4)	4.38 (111,1)	8	1.25 x 14 (31,8 x 355,6)	1.375 (34,9)	38.9 (17,64)
6 5/8 ⁽⁴⁾	2220 (15,3)	2025 (14,0)	15.0 (381,0)	4.375 (111,1)	12.50 (317,5)	4.88 (98,4)	12	1.125 x 14 (28,6 x 355,6)	1.25 (31,8)	39.4 (17,87)
7 ⁽⁴⁾	2220 (15,3)	2025 (14,0)	15.0 (381,0)	5.00 (127,0)	12.50 (317,5)	4.50 (114,3)	12	1.125 x 14 (28,6 x 355,6)	1.25 (31,8)	43.5 (19,73)
9 5/8 ⁽⁴⁾	2220 (15,3)	2025 (14,0)	18.5 (469,9)	5.25 (133,4)	15.50 (393,7)	4.75 (120,7)	12	1.375 x 14 (34,9 x 355,6)	1.50 (38,1)	64.9 (29,44)

⁽¹⁾ Bolt lengths in table are for fiberglass-to-fiberglass flange connections. Fiberglass-to-steel bolt lengths are provided in INS8000.


⁽²⁾ Spiral wound gaskets (Flexitalic[®]) are required in all flange joints

⁽⁴⁾ Steel backing plates are required.


⁽³⁾ Spacer rings are required for make-up of ANSI 600-1500 when mated to steel raised face flanges.

Flanges⁽²⁾ Female (continued)

Thread Size In	Pressure Rating	Pressure Rating	A	B	C	X ₁ In (mm)	No. of Bolts	Bolt Size Length In (mm)	Bolt Hole Size In (mm)	Wt Lbs (kg)
	psi (MPa) 100°F	psi (MPa) 200°F	Flange O.D. In (mm)	Flange Width In (mm)	Bolt Circle In (mm)					
ANSI 900/1500⁽³⁾										
1.90	3705 (25,6)	3375 (23,3)	7.00 (177,8)	2.56 (65,0)	4.875 (123,8)	2.05 (52,1)	4	1 x 10 (25,4 x 254,0)	1.125 (28,6)	5.6 (2,54)
2 3/8	3705 (25,6)	3375 (23,3)	8.50 (215,9)	3.06 (77,7)	6.50 (165,1)	2.56 (65,1)	8	.875 x 10 (22,2 x 254,0)	1.00 (25,4)	9.7 (4,40)
2 7/8	3705 (25,6)	3375 (23,3)	9.625 (244,5)	3.38 (85,9)	7.50 (190,5)	2.88 (73,0)	8	1 x 12 (25,4 x 304,8)	1.125 (28,6)	13.6 (6,17)
ANSI 1500⁽³⁾										
3 1/2	3705 (25,6)	3375 (23,3)	10.5 (266,7)	3.63 (92,2)	8.00 (203,2)	3.13 (79,4)	8	1.125 x 12 (25,4 x 304,8)	1.25 (31,8)	16.8 (7,62)
4 1/2	3705 (25,6)	3375 (23,3)	10.5 (266,7)	4.00 (101,6)	8.00 (203,2)	3.50 (88,9)	8	1.125 x 12 (25,4 x 304,8)	1.125 (28,6)	18.8 (8,53)
4 1/2 ⁽⁴⁾	3705 (25,6)	3375 (23,3)	12.25 (311,2)	4.00 (101,6)	9.50 (241,3)	3.50 (88,9)	8	1.25 x 14 (31,8 x 355,6)	1.375 (34,9)	24.9 (11,29)
5 1/2 ⁽⁴⁾	3705 (25,6)	3375 (23,3)	12.25 (311,2)	4.88 (124,0)	9.50 (241,3)	4.38 (111,1)	8	1.25 x 14 (31,8 x 355,6)	1.375 (34,9)	28.5 (12,93)
5 1/2 ⁽⁴⁾	3705 (25,6)	3375 (23,3)	14.75 (374,7)	4.88 (124,0)	11.50 (292,1)	4.38 (111,1)	8	1.5 x 14 (38,1 x 355,6)	1.625 (41,3)	44.9 (20,37)
6 5/8 ⁽⁴⁾	3705 (25,6)	3375 (23,3)	15.5 (393,7)	4.375 (111,1)	12.5 (317,5)	3.88 (98,4)	12	1.375 x 14 (34,9 x 355,6)	1.50 (38,1)	41.1 (18,64)
7 ⁽⁴⁾	3705 (25,6)	3375 (23,3)	15.5 (393,7)	5.00 (127,0)	12.5 (317,5)	4.50 (114,3)	12	1.375 x 14 (34,9 x 355,6)	1.50 (38,1)	45.4 (20,59)
9 5/8 ⁽⁴⁾	3705 (25,6)	3375 (23,3)	19.0 (482,6)	5.25 (133,4)	15.5 (393,7)	4.75 (120,7)	12	1.625 x 14 (41,3 x 355,6)	1.75 (44,5)	72.0 (32,66)

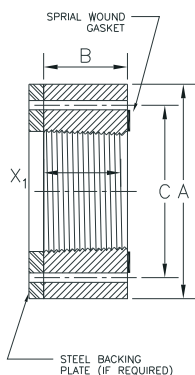

Bolt Torquing Sequence

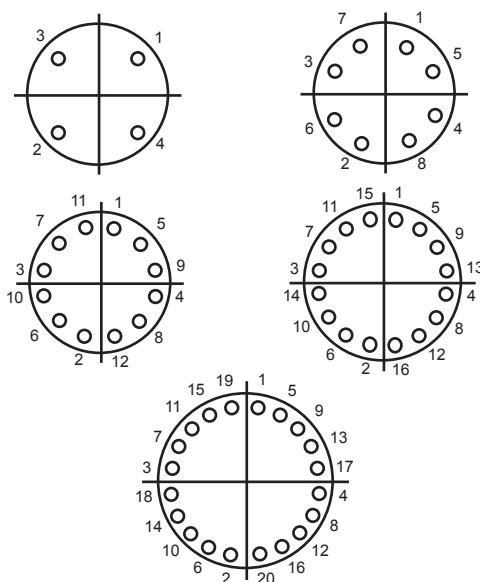

⁽¹⁾ Bolt lengths in table are for fiberglass-to-fiberglass flange connections. Fiberglass-to-steel bolt lengths are provided in INS8000.

⁽²⁾ Spiral wound gaskets (Flexitalic[®]) are required in all flange joints

⁽³⁾ Spacer rings are required for make-up of ANSI 600-1500 when mated to steel raised face flanges.

⁽⁴⁾ Steel backing plates are required.

Bolt Torque vs. Bolt Size

Bolt Size (inch)	Torque			
	Grade 2		Grade 5	
	ft/lb	N/m	ft/lb	N/m
5/8"	54	73	89	120
3/4"	96	130	160	216
7/8"	155	210	258	349
1"	230	311	386	523
1 1/8"	324	439	544	737
1 1/4"	460	623	776	1052
1 3/8"	595	806	1006	1363
1 1/2"	795	1077	1347	1826
Multiply by 0.9 for plating				

NOTE: Regardless of bolting material, do not exceed Grade 5 torque.

Changeover Couplings

Female x NPT Female

Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
	psi (MPa)						
1.90 x 1.50 NPT	2000 (13,8)		5.0 (127,0)	3.0 (76,2)	2.06 (52,4)	1.02 (25,9)	1.5 (0,68)
2 3/8 x 2 NPT	2000 (13,8)		4.625 (117,5)	3.7 (94,0)	2.56 (65,1)	1.05 (26,7)	2.5 (1,13)
2 7/8 x 2 1/2 NPT	1500 (10,3)		5.5 (139,7)	4.4 (111,6)	2.88 (73,0)	1.57 (39,9)	4.5 (2,04)
3 1/2 x 3 NPT	1500 (10,3)		6.0 (152,4)	5.3 (134,6)	3.13 (79,4)	1.63 (41,4)	6 (2,72)
4 1/2 x 4 NPT	1500 (10,3)		6.875 (174,8)	6.8 (172,7)	3.50 (88,9)	1.73 (43,9)	14 (6,35)
4 1/2 x 2 NPT	2000 (13,8)		13.0 (330,2)	4.80 (121,9)	3.50 (88,9)	1.06 (26,9)	14.0 (20,8)
5 1/2 x 5 NPT	1500 (10,3)		7.75 (196,9)	7.2 (182,9)	4.38 (111,1)	1.94 (49,3)	16 (7,26)
6 5/8 x 6 NPT	1000 (6,9)		8.0 (203,2)	8.3 (210,8)	3.88 (98,4)	1.95 (49,5)	20 (9,07)
7 x 6 NPT	1000 (6,9)		8.0 (203,2)	8.9 (226,1)	4.50 (114,3)	1.95 (49,5)	25 (11,34)
8 5/8 x 8 NPT	1000 (6,9)		8.5 (215,9)	10.8 (274,3)	4.50 (114,3)	2.15 (54,6)	30 (13,61)
9 5/8 x 8 NPT	1000 (6,9)		8.5 (215,9)	11.4 (289,6)	4.75 (120,7)	2.15 (54,6)	42 (19,05)


Bull Plugs

Male

Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
	psi (MPa)						
1.90	4000 (27,6)		8.0 (203,2)	2.15 (54,6)	2.06 (52,4)	-	2.5 (1,13)
2 3/8	4000 (27,6)		10.0 (254,0)	2.5 (66,0)	2.56 (65,1)	-	4 (1,81)
2 7/8	4000 (27,6)		10.0 (254,0)	3.10 (78,7)	2.88 (73,0)	-	5 (2,27)
3 1/2	4000 (27,6)		10.0 (254,0)	3.75 (95,3)	3.13 (79,4)	-	7 (3,18)
4 1/2	4000 (27,6)		11.0 (279,4)	4.80 (121,9)	3.50 (88,9)	-	14 (6,35)
5 1/2	4000 (27,6)		11.0 (279,4)	5.55 (141,0)	4.38 (111,1)	-	20 (9,07)
6 5/8	2000 (13,8)		11.0 (279,4)	6.65 (168,9)	3.88 (98,4)	-	27 (12,25)
7	2500 (17,2)		11.0 (279,4)	7.05 (179,1)	4.50 (114,3)	-	36 (16,33)
8 5/8	1500 (10,3)		11.0 (279,4)	8.85 (224,8)	4.50 (114,3)	-	48 (21,77)
9 5/8	2000 (13,8)		12.0 (304,8)	9.65 (245,1)	4.75 (120,7)	-	65 (29,48)


Changeover Nipples and Swages

Male x NPT Male

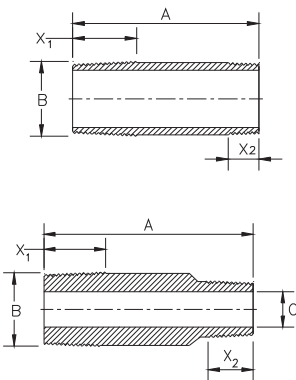

Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
1.90 x 1.50 NPT	2000 (13,8)	9.0 (228,6)	2.15 (54,6)	2.06 (52,4)	1.02 (25,9)	1.1 (0,50)
2 3/8 x 2 NPT	2000 (13,8)	10.0 (254,0)	2.60 (66,0)	2.56 (65,1)	1.05 (26,7)	1.7 (0,77)
2 7/8 x 2 NPT	2000 (13,8)	11.0 (279,4)	3.10 (78,7)	2.88 (73,0)	1.06 (26,9)	3.5 (5,21)
2 7/8 x 2 1/2 NPT	1500 (10,3)	11.0 (279,4)	3.10 (78,7)	2.88 (73,0)	1.57 (39,9)	2.5 (1,13)
3 NPT x 2 3/8	1500 (10,3)	11.0 (279,4)	3.75 (95,3)	1.63 (41,4)	2.56 (65,1)	5.5 (8,18)
3 NPT x 2 7/8	1500 (10,3)	11.0 (279,4)	3.75 (95,3)	1.63 (41,4)	2.88 (73,0)	7.0 (10,4)
3 1/2 x 2 NPT	2000 (13,8)	11.0 (279,4)	3.75 (95,3)	3.13 (79,4)	1.06 (26,9)	5.5 (8,18)
3 1/2 x 2 1/2 NPT	1500 (10,3)	11.0 (279,4)	3.75 (95,3)	3.13 (79,4)	1.57 (39,9)	7.0 (10,4)
3 1/2 x 3 NPT	1500 (10,3)	11.0 (279,4)	3.75 (95,3)	3.13 (79,4)	1.63 (41,4)	3.2 (1,45)
4 NPT x 2 3/8	1500 (10,3)	13.0 (330,2)	4.80 (121,9)	1.73 (43,9)	2.56 (65,1)	12.0 (17,9)
4 NPT x 3 1/2	1500 (10,3)	13.0 (330,2)	4.71 (119,6)	1.73 (43,9)	3.13 (79,4)	10.6 (15,8)
4 1/2 x 4 NPT	1500 (10,3)	12.0 (304,8)	4.80 (121,9)	3.50 (88,9)	1.94 (49,3)	5.2 (2,36)
4 1/2 x 2 NPT	2000 (13,8)	13.0 (330,2)	4.80 (121,9)	3.50 (88,9)	1.06 (26,9)	14.0 (20,8)
4 1/2 x 2 1/2 NPT	1500 (10,3)	13.0 (330,2)	4.80 (121,9)	3.50 (88,9)	1.57 (39,9)	12.0 (17,9)
4 1/2 x 3 NPT	1500 (10,3)	13.0 (330,2)	4.71 (119,6)	3.50 (88,9)	1.63 (41,4)	10.6 (15,8)
5 1/2 x 5 NPT	1500 (10,3)	13.0 (330,2)	5.55 (141,0)	4.38 (111,1)	1.73 (43,9)	6.0 (2,72)
6 5/8 x 6 NPT	1000 (6,9)	13.0 (330,2)	6.65 (168,9)	3.88 (98,4)	1.95 (49,5)	8.1 (3,67)
7 x 6 NPT	1000 (6,9)	13.0 (330,2)	7.05 (179,1)	4.50 (114,3)	1.95 (49,5)	9.8 (4,45)
8 5/8 x 8 NPT	1000 (6,9)	13.0 (330,2)	8.85 (224,8)	4.50 (114,3)	2.15 (54,6)	11.1 (5,03)
9 5/8 x 8 NPT	1000 (6,9)	13.0 (330,2)	9.65 (245,1)	4.75 (120,7)	2.15 (54,6)	20.2 (9,16)


Reducing Tee Female



Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
2 3/8 x 1.90	1500 (10,3)	5.25 (133,4)	5.75 (146,1)	3.4 (86,4)	2.56 (65,1)	2.06 (52,4)	11 (4,99)
	2500 (17,2)			4.0 (101,6)			12 (5,44)
3 1/2 x 2 3/8	1250 (8,6)	6.50 (165,1)	7.00 (177,8)	4.8 (121,9)	3.13 (79,4)	2.56 (65,1)	14 (6,35)
	2000 (13,8)			5.5 (139,7)			21 (9,53)
	2500 (17,2)			5.95 (151,1)			26 (11,79)
	3000 (20,7)			6.4 (162,6)			50 (22,68)
	4000 (27,6)			7.3 (185,4)			65 (29,48)
4 1/2 x 2 3/8	1250 (8,6)	7.50 (190,5)	7.50 (190,5)	6.2 (157,5)	3.50 (88,9)	2.56 (65,1)	25 (11,34)
	2000 (13,8)			7.0 (177,8)			39 (17,69)
	2500 (17,2)			7.6 (193,0)			48 (21,77)
	3000 (20,7)			8.1 (205,7)			75 (34,02)
	4000 (27,6)			9.0 (228,6)			85 (38,56)
4 1/2 x 3 1/2	1250 (8,6)	7.50 (190,5)	8.50 (215,9)	6.2 (157,5)	3.50 (88,9)	3.13 (79,4)	25 (11,34)
	2000 (13,8)			7.0 (177,8)			39 (17,69)
	2500 (17,2)			7.6 (193,0)			48 (21,77)
	3000 (20,7)			8.1 (205,7)			75 (34,02)
	4000 (27,6)			9.0 (228,6)			85 (38,56)
6 5/8 x 3 1/2	1250 (8,6)	8.50 (215,9)	9.75 (247,7)	8.5 (215,9)	3.88 (98,4)	3.13 (79,4)	60 (27,22)
	2000 (13,8)			9.5 (241,3)			80 (36,29)
6 5/8 x 4 1/2	1250 (8,6)	8.50 (215,9)	9.75 (247,7)	8.5 (215,9)	3.88 (98,4)	3.50 (88,9)	60 (27,22)
	2000 (13,2)			9.5 (241,3)			80 (36,29)
	2250 (15,5)			10 (254,0)			100 (148,8)
7 x 3 1/2	2000 (13,2)	9.625 (244,5)	9.50 (241,3)	10.1 (256,5)	4.50 (114,3)	3.13 (79,4)	75 (34,02)
7 x 4 1/2	2000 (13,2)		10.00 (254,0)	10.1 (256,5)		3.50 (88,9)	75 (34,02)
8 5/8 x 3 1/2	1250 (8,6)	10.00 (254,0)	11.75 (298,5)	11.0 (279,4)	4.50 (114,3)	3.13 (79,4)	70 (31,75)
8 5/8 x 4 1/2	1250 (8,6)			11.0 (279,4)		3.50 (88,9)	70 (31,75)
8 5/8 x 6 5/8	1250 (8,6)			11.0 (279,4)		3.88 (98,4)	55 (24,95)
10SS x 6 5/8	800 (5,5)	12.00 (304,8)	12.00 (304,8)	13.5 (342,9)	5.40 (137,2)	3.88 (98,4)	85 (38,56)
	1000 (6,9)			14.0 (355,6)			103 (46,723)
	1250 (8,6)			14.6 (370,8)			120 (54,4)

Reducing Tee


Female
(continued)



Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
10SS x 8 5/8	800 (5,5)	12.00 (304,8)	12.00 (304,8)	13.5 (342,9)	5.4 (137,2)	4.50 (114,3)	90 (40,82)
	1000 (6,9)			14.0 (355,6)			125 (56,70)
	1250 (8,6)			14.6 (370,8)			160 (72,58)
10SS x 8SS	800 (5,5)	12.00 (304,8)	13.50 (342,9)	13.5 (342,9)	5.40 (137,2)	4.75 (120,7)	98 (44,45)
	1000 (6,9)			14.0 (355,6)			125 (56,70)
	1250 (8,6)			14.6 (370,8)			160 (72,58)
12SS x 8 5/8	1250 (8,6)	14.75 (374,7)	14.75 (374,7)	17.1 (434,3)	6.10 (154,9)	4.50 (114,3)	230 (104,33)
12SS x 8SS	1250 (8,6)					4.75 (120,7)	225 (102,06)
12SS x 10SS	1250 (8,6)					5.40 (137,2)	245 (111,13)


Reducing Bushing

Male x Female




Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
2 7/8 x 1.90	2500 (17,2)	10.0 (254,0)	3.1 (78,7)	1.44 (36,6)	2.88 (73,0)	2.06 (52,4)	2.5 (1.13)
3 1/2 x 1.90	3500 (24,1)	10.0 (254,0)	3.75 (95,3)	1.44 (36,6)	3.13 (79,4)	2.06 (52,4)	6 (2,72)
3 1/2 x 2 3/8	2500 (17,2)	10.88 (276,4)		1.94 (49,3)		2.56 (65,1)	4 (1,81)
4 1/2 x 1.90	3500 (24,1)	10.0 (254,0)	4.80 (121,9)	1.44 (36,6)	3.50 (88,9)	2.06 (52,4)	11 (4,99)
4 1/2 x 2 3/8	4000 (27,6)	10.88 (276,4)		1.94 (49,3)		2.56 (65,1)	10 (4,54)
4 1/2 x 2 7/8	3000 (20,7)			2.36 (59,9)		2.88 (73,0)	8.5 (3,86)
4 1/2 x 3 1/2	1000 (13,8)	10.88 (276,4)	4.80 (121,9)	2.95 (74,9)	3.50 (88,9)	3.13 (79,4)	6.0 (2,72)
5 1/2 x 2-3/8	4000 (27,6)	10.88 (276,4)	5.55 (141,0)	1.94 (49,3)	4.38 (111,1)	2.56 (65,1)	16 (7,26)
5 1/2 x 2 7/8	4000 (27,6)			2.36 (59,9)		2.88 (73,0)	14 (6,35)
5 1/2 x 3 1/2	4000 (27,6)	11.13 (282,7)		2.95 (74,9)		3.13 (79,4)	11.5 (5,22)
6 5/8 x 2 3/8	2000 (13,8)	10.88 (276,4)	6.65 (168,9)	1.95 (49,5)	3.88 (98,4)	2.56 (65,1)	27 (12,25)
6 5/8 x 2 7/8	2000 (13,8)			2.36 (59,9)		2.88 (73,0)	25 (11,34)
6 5/8 x 3 1/2	2000 (13,8)	11.13 (282,7)		2.94 (74,7)		3.13 (79,4)	22 (9,98)
6 5/8 x 4 1/2	2000 (13,8)			3.95 (100,3)		3.50 (88,9)	16 (7,26)
7 x 3 1/2	2500 (17,2)	11.13 (282,7)	7.10 (180,3)	2.95 (74,9)	4.50 (114,3)	3.13 (79,4)	24 (10,89)
7 x 4 1/2	2500 (17,2)			3.95 (100,3)		3.50 (88,9)	21 (9,53)
8 5/8 x 4 1/2	1500 (10,3)			3.95 (100,3)		3.50 (88,9)	44 (19,96)

Reducing Bushing Male x Female (continued)




Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
8 5/8 x 6 5/8	1500 (10,3)	12.0 (304,8)		5.95 (151,1)		3.88 (98,4)	30 (13,61)
9 5/8 x 6 5/8	2000 (13,8)	11.98 (304,3)	9.65 (245,1)				38 (17,24)
10SS x 6 5/8	1000 (13,8)	12.0 (304,8)	11.25 (285,8)	5.95 (151,1)	5.40 (137,2)	3.88 (98,4)	65 (29,48)
10SS x 8 5/8	1000 (13,8)			7.74 (196,6)		4.50 (114,3)	50 (22,68)
10SS x 8SS	1000 (13,8)			7.74 (196,6)		4.75 (120,7)	50 (22,68)
12SS x 8 5/8	1000 (13,8)	12.0 (304,8)	14.4 (365,8)	7.74 (196,6)	6.10 (154,9)	4.50 (114,3)	80 (36,28)
12SS x 8SS	1000 (13,8)			7.74 (196,6)		4.75 (120,7)	80 (36,28)
12SS x 10SS	1000 (13,8)			11.81 (300,0)		5.40 (137,2)	70 (31,77)

Reducing Coupling Female x Female




Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
2 3/8 x 1.90	4000 (27,6)	6.625 (168,3)	4.25 (108,0)	2.56 (65,1)	2.06 (52,4)	4 (1,81)
2 7/8 x 1.90	4000 (27,6)	6.8 (172,7)	5.25 (133,4)	2.88 (73,0)	2.06 (52,4)	7 (3,18)
2 7/8 x 2 3/8	2000 (13,8)	4.2 (106,7)				6.0 (8,93)
2 7/8 x 2 3/8	4000 (27,6)	7.2 (182,9)			2.56 (65,1)	8.5 (3,86)
3 1/2 x 1.90	4000 (27,6)	8.0 (203,2)	6.0 (152,4)	3.13 (79,4)	2.06 (52,4)	18 (8,16)
3 1/2 x 2 3/8	4000 (27,6)				2.56 (65,1)	13 (5,90)
3 1/2 x 2 7/8	4000 (27,6)				2.88 (73,0)	12 (5,44)
4 1/2 x 1.90	4000 (27,6)	10.125 (257,2)	7.45 (189,2)	3.50 (88,9)	2.06 (52,4)	28 (12,70)
4 1/2 x 2 3/8	4000 (27,6)				2.56 (65,1)	24 (10,89)
4 1/2 x 2 7/8	4000 (27,6)	10.375 (263,5)			2.88 (73,0)	26 (11,79)
4 1/2 x 3 1/2	4000 (27,6)	10.125 (257,2)			3.13 (79,4)	20 (9,07)
5 1/2 x 2 3/8	4000 (27,6)	10.375 (263,5)	8.7 (221,0)	4.38 (111,1)	2.56 (65,1)	38 (17,24)
5 1/2 x 2 7/8	4000 (27,6)		8.5 (215,9)		2.88 (73,0)	30 (13,61)
5 1/2 x 3 1/2	4000 (27,6)				3.13 (79,4)	34 (15,42)
5 1/2 x 4 1/2	4000 (27,6)				3.50 (88,9)	30 (13,61)
6 5/8 x 3 1/2	2000 (13,8)	15.0 (381,0)	8.5 (215,9)	3.88 (98,4)	3.13 (79,4)	37 (16,78)
6 5/8 x 4 1/2	2000 (13,8)				3.50 (88,9)	34 (15,42)

Reducing Coupling Female x Female (continued)




Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
7 x 4 1/2	2500 (17,2)	15.0 (381,0)	9.5 (241,3)	4.50 (114,3)	3.50 (88,9)	44 (19,96)
7 x 5 1/2	2500 (17,2)				4.38 (111,1)	40 (18,14)
8 5/8 x 4 1/2	1500 (10,3)	15.0 (381,0)	10.3 (261,6)	4.50 (114,3)	3.50 (88,9)	55 (24,95)
8 5/8 x 6 5/8	1500 (10,3)	13.0 (330,2)			3.88 (98,4)	45 (20,41)
8 5/8 x 7	1500 (10,3)	15.0 (381,0)			4.50 (114,3)	39 (17,69)
9 5/8 x 4 1/2	2000 (13,8)	15.0 (381,0)	12.2 (309,9)	4.75 (120,7)	3.50 (88,9)	88 (39,92)
9 5/8 x 7	2000 (13,8)				4.50 (114,3)	76 (34,47)
9 5/8 x 8 5/8	1500 (10,3)				4.50 (114,3)	58 (26,31)
8SS x 4 1/2	1250 (8,6)	16.5 (419,1)	10.0 (254,0)	6.10 (154,9)	3.50 (88,9)	57 (84,8)
8SS x 6 5/8	1250 (8,6)	14.5 (368,3)			3.88 (98,4)	47 (69,8)
10SS x 6 5/8	1250 (8,6)	19.5 (495,3)	13.8 (350,5)	5.40 (137,2)	3.88 (98,4)	68 (30,84)
10SS x 8 5/8	1250 (8,6)				4.50 (114,3)	63 (28,58)
10SS x 8SS	1250 (8,6)	15.0 (381,0)			4.75 (120,7)	50 (22,68)
12SS x 8 5/8	1250 (8,6)	18.3 (464,8)	16.0 (406,4)	6.10 (154,9)	4.50 (114,3)	90 (40,82)
12SS x 9 5/8	1250 (8,6)	20.5 (520,7)				90 (40,82)
12SS x 8SS	1250 (8,6)	19.5 (495,3)			4.75 (120,7)	90 (40,82)
12SS x 10SS	1250 (8,6)	16.0 (406,4)			5.40 (137,2)	75 (34,02)

Swage Nipples Male x Male




Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
2 3/8 x 1.90	2500 (17,2)	12.0 (304,8)	2.60 (66,0)	1.50 (38,1)	2.56 (65,1)	2.06 (52,4)	3.0 (1,36)
2 7/8 x 1.90	3500 (24,1)	12.0 (304,8)	3.10 (78,7)	1.50 (38,1)	2.88 (73,0)	2.06 (52,4)	4.5 (2,04)
2 7/8 x 2 3/8	2500 (17,2)			2.00 (50,8)		2.56 (65,1)	3.5 (1,59)
2 7/8 x 2 7/8	3500 (24,1)						3.5 (1,59)
3 1/2 x 1.90	3500 (24,1)	12.0 (304,8)	3.75 (95,3)	1.50 (38,1)	3.13 (79,4)	2.06 (52,4)	8.0 (3,63)
3 1/2 x 2 3/8	3500 (24,1)			2.00 (50,8)		2.56 (65,1)	5.5 (2,49)
3 1/2 x 2 7/8	3000 (20,7)			2.43 (61,7)		2.88 (73,0)	4.5 (2,04)

Swage Nipples
Male x Male
(continued)




Thread Size Inches	Pressure Rating		A In (mm)	B In (mm)	C In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)
	psi	(MPa)						
4 1/2 x 2 3/8	3500	(24,1)	14.0	4.8	2.00	3.50	2.56	14.0
			(355,6)	(121,9)	(50,8)	(88,9)	(65,1)	(6,35)
4 1/2 x 2 7/8	3500	(24,1)			2.43		2.88	12.0
					(61,7)		(73,0)	(5,44)
4 1/2 x 3 1/2	3000	(20,7)		4.71	3.00		3.13	10.0
				(119,6)	(76,2)		(79,4)	(4,54)
5 1/2 x 3 1/2	3000	(20,7)	16	5.55	3.00	4.38	3.13	18.0
			(406,4)	(140,8)	(76,2)	(111,1)	(79,4)	(8,16)
5 1/2 x 4 1/2	2000	(13,8)			3.90		3.50	12.0
					(99,1)		(88,9)	(5,44)
6 5/8 x 3 1/2	2000	(13,8)	16	6.65	3.00	3.88	3.13	28
			(406,4)	(168,9)	(76,2)	(98,4)	(79,4)	(12,70)
6 5/8 x 4 1/2	2000	(13,8)			3.90		3.50	26
					(99,1)		(88,9)	(11,79)
6 5/8 x 5 1/2	2000	(13,8)			4.74		4.38	20
					(120,4)		(111,1)	(9,07)
7 x 4 1/2	2000	(13,8)	16.0	7.05	3.90	4.50	3.50	28
			(406,4)	(179,1)	(99,1)	(114,3)	(88,9)	(12,70)
7 x 5 1/2	2000	(13,8)			4.74		4.38	21
					(120,4)		(111,1)	(9,53)
7 x 6 5/8	1000	(6,9)			5.85		3.88	15
					(148,6)		(98,4)	(6,80)
7 x 6 5/8	2000	(13,8)			5.85		3.88	18.5
					(148,6)		(98,4)	(8,39)
8 5/8 x 5 1/2	1500	(10,3)	17.0	8.65	4.74	4.50	4.38	45
			(431,8)	(219,7)	(120,4)	(114,3)	(111,1)	(20,41)
8 5/8 x 6 5/8	1000	(6,9)			5.85		3.88	40
					(148,6)		(98,4)	(18,14)
8 5/8 x 6 5/8	2000	(13,8)			5.50		3.88	44
					(139,7)		(98,4)	(19,96)
8 5/8 x 7	1500	(10,3)			5.85		4.50	40
					(148,6)		(114,3)	(18,14)
9 5/8 x 6 5/8	1000	(6,9)	16.0	9.65	5.85	4.75	3.88	35
			(406,4)	(245,1)	(148,6)	(120,7)	(98,4)	(15,88)
9 5/8 x 6 5/8	2000	(13,8)			5.50		3.88	41
					(139,7)		(98,4)	(18,60)
9 5/8 x 7	2000	(13,8)	17.0		5.85		4.50	50
			(431,8)		(148,6)		(114,3)	(22,68)
9 5/8 x 8 5/8	1250	(8,6)	18.0	9.44	7.50		4.50	31
			(457,2)	(239,8)	(190,5)		(114,3)	(14,06)
10SS x 6 5/8	1200	(8,2)	17.0	11.25	5.93	5.40	3.88	80
			(431,8)	(285,8)	(150,6)	(137,2)	(98,4)	(36,29)
10SS x 8 5/8	1200	(8,2)			7.74		4.50	55
					(196,6)		(114,3)	(24,95)
10SS x 8SS	1200	(8,2)					4.75	55
							(120,7)	(24,95)
12SS x 8 5/8	1200	(8,2)	18.0	13.25	7.74	6.10	4.50	100
			(457,2)	(336,6)	(196,6)	(154,9)	(114,3)	(45,36)
12SS x 8SS	1200	(8,2)			7.74		4.75	100
					(196,6)		(120,7)	(45,36)
12SS x 10SS	1200	(8,2)			9.84		5.40	65
					(249,9)		(137,2)	(29,48)

Threaded Couplings Female x Female



Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	Wt Lbs (kg)
1.90	2000 (13,8)	5.125 (130,2)	2.80 (71,1)	2.06 (52,4)	1.1 (0,50)
	2500 (17,2)		2.90 (73,7)		1.2 (0,54)
	3000 (20,7)		3.00 (76,2)		1.4 (0,64)
	3500 (24,1)		3.15 (80,0)		1.6 (0,74)
	4000 (27,6)		3.30 (83,8)		1.9 (0,87)
2 3/8	1500 (10,3)	6.126 (155,6)	3.25 (82,6)	2.56 (65,1)	1.4 (0,64)
	2000 (13,8)		3.40 (86,4)		1.8 (0,80)
	2500 (17,2)		3.60 (91,4)		2.2 (1,02)
	3000 (20,7)		3.70 (94,0)		2.5 (1,13)
	3500 (24,1)		3.90 (99,1)		3.0 (1,37)
2 7/8	1500 (10,3)	6.750 (171,5)	3.80 (96,5)	2.88 (73,0)	2.0 (0,91)
	2000 (13,8)		4.00 (101,6)		2.6 (1,17)
	2500 (17,2)		4.20 (106,7)		3.2 (1,45)
	3000 (20,7)		4.40 (111,8)		3.9 (1,75)
	3500 (24,1)		4.60 (116,8)		4.5 (2,05)
3 1/2	1500 (10,3)	7.250 (184,2)	4.60 (116,8)	3.13 (79,4)	3.1 (1,41)
	2000 (13,8)		4.80 (121,9)		3.9 (1,76)
	2500 (17,2)		5.10 (129,5)		5.1 (2,30)
	3000 (20,7)		5.25 (133,4)		5.7 (2,58)
	3500 (24,1)		5.50 (139,7)		6.8 (3,08)
4	1500 (10,3)	8.750 (222,3)	5.00 (127,0)	3.88 (98,4)	3.5 (1,59)
	2000 (13,8)		5.25 (133,4)		4.8 (2,16)
	2500 (17,2)		5.55 (141,0)		6.3 (2,88)
	3000 (20,7)		5.80 (147,3)		7.7 (3,50)
4 1/2	1500 (10,3)	8.000 (203,2)	5.80 (147,3)	3.50 (88,9)	5.3 (2,39)
	2000 (13,8)		6.10 (154,9)		6.9 (3,11)
	2500 (17,2)		6.40 (162,6)		8.5 (3,86)
	3000 (20,7)		6.70 (170,2)		10.3 (4,66)
	3500 (24,1)		7.00 (177,8)		12.1 (5,49)
4000 (27,6)	7.20 (182,9)	13.4 (6,07)			


Threaded Couplings
Female x Female
(continued)



Thread Size Inches	Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	Wt Lbs (kg)
5 1/2	1000 (6,9)	9.750 (247,7)	6.25 (158,8)	4.38 (111,1)	5.5 (2,51)
	1250 (8,6)		6.45 (163,8)		6.9 (3,14)
	1500 (10,3)		6.60 (167,6)		8.0 (3,62)
	1750 (12,1)		6.75 (171,5)		9.1 (4,13)
	2000 (13,8)		7.00 (177,8)		10.9 (4,96)
	2500 (17,2)		7.30 (185,4)		13.3 (6,02)
	3000 (20,7)		7.60 (193,0)		15.7 (7,13)
	3500 (24,1)		7.90 (200,7)		18.2 (8,27)
	4000 (27,6)		8.20 (208,3)		20.9 (9,46)
6 5/8	800 (5,5)	8.75 (222,3)	7.35 (186,7)	3.88 (98,4)	5.6 (2,55)
	1000 (6,9)		7.55 (191,8)		7.1 (3,21)
	1250 (8,6)		7.70 (195,6)		8.2 (3,71)
	1500 (10,3)		7.90 (200,7)		9.7 (4,40)
	2000 (13,8)		8.25 (209,6)		12.5 (5,66)
	2500 (17,2)		8.70 (221,0)		16.2 (7,34)
7	800 (5,5)	10.00 (254,0)	7.85 (199,4)	4.50 (114,3)	7.7 (3,48)
	1000 (6,9)		8.00 (203,2)		9.0 (4,09)
	1250 (8,6)		8.20 (208,3)		10.8 (4,91)
	1500 (10,3)		8.40 (213,4)		12.7 (5,75)
	2000 (13,8)		8.75 (222,3)		16.0 (7,26)
	2500 (17,2)		9.20 (233,7)		20.5 (9,31)
8 5/8	800 (5,5)	10.00 (254,0)	9.50 (241,3)	4.50 (114,3)	9.9 (4,47)
	1000 (6,9)		9.70 (246,4)		12.0 (5,44)
	1250 (8,6)		10.00 (254,0)		15.3 (6,93)
	1500 (10,3)		10.20 (259,1)		17.5 (7,96)
9 5/8	800 (5,5)	10.50 (266,7)	10.70 (271,8)	4.75 (120,7)	13.5 (6,12)
	1000 (6,9)		10.90 (276,9)		16.7 (7,57)
	1250 (8,6)		11.10 (281,9)		19.3 (8,74)
	1500 (10,3)		11.50 (292,1)		24.6 (11,14)
	2000 (13,8)		11.90 (302,3)		30.0 (13,63)
8SS	800 (5,5)	10 (254,0)	9.60 (243,8)	4.75 (120,7)	9.0 (4,08)
	1250 (8,6)		10.20 (259,1)		15.0 (6,80)
10SS	800 (5,5)	11.375 (288,9)	12.8 (325,1)	5.40 (137,2)	18.0 (8,16)
	1250 (8,6)		13.6 (345,4)		30.0 (13,61)
12SS	800 (5,5)	12.2 (309,9)	14.8 (375,9)	6.10 (154,9)	26.0 (11,79)
	1250 (8,6)		15.7 (398,8)		42.0 (19,05)

Threaded Adapter

Bonded Bell x Male




Thread Size	Pipe Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)	Anhydride		Aliphatic		Aromatic
	Inches	psi (MPa)						STD	15HR	STD	15HR	15HR
1.90	1250 (8,6)	1500 (10,3)	4.25 (108,0)	2.15 (54,6)	4.00 (101,6)	2.36 (59,9)	0.6 (0,27)	N/A	R	N/A	N/A	N/A
								R	R	R	R	R
								R	R	R	R	Q
								R	Q	R	R	Q
								R	Q	R	Q	S
								Q	S	R	P	N/A
2 3/8	750 (5,2)	800 (5,5)	5.00 (127,0)	2.71 (68,8)	4.75 (120,7)	2.56 (65,1)	0.9 (0,41)	N/A	S	N/A	R	N/A
								N/A	N/A	R	N/A	N/A
								N/A	S	R	R	S
								S	S	R	R	S
								S	S	R	R	S
								S	S	R	S	Q
								S	Q	R	Q	P
								Q	P	R	P	N/A
								Q	P	S	N/A	Q
2 7/8	750 (5,2)	800 (5,5)	5.25 (133,4)	3.21 (81,5)	5.00 (127,0)	2.88 (73,0)	1.2 (0,54)	N/A	T	N/A	U	T
								N/A	N/A	U	N/A	N/A
								T	T	U	U	T
								T	T	U	U	T
								T	T	U	T	Q
								T	S	U	S	Q
								S	Q	U	Q	N/A
								Q	Q	T	Q	N/A
								Q	N/A	R	Q	Q
3 1/2	500 (3,5)	750 (5,2)	5.50 (139,7)	3.89 (98,8)	5.25 (133,4)	3.13 (79,4)	1.6 (0,73)	N/A	T	U	U	T
								N/A	T	N/A	U	T
								T	N/A	U	N/A	N/A
								T	T	U	U	T
								T	T	U	U	S
								T	S	U	S	S
								T	S	U	S	Q
								S	R	S	R	P
								S	Q	S	R	S
R	P	R	Q	S								
4 1/2	500 (3,5)	750 (5,2)	5.75 (146,1)	4.89 (124,2)	5.50 (139,7)	3.50 (88,9)	2.4 (1,09)	T	T	U	U	T
								N/A	T	N/A	U	T
								T	N/A	U	N/A	N/A
								T	T	U	U	S
								T	S	U	T	R
								S	R	T	R	Q
								S	R	S	Q	P
R	P	R	P	Q								

Threaded Adapter

Bonded Bell x Male
(continued)

Thread Size	Pipe Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	X ₂ In (mm)	Wt Lbs (kg)	Anhydride		Aliphatic		Aromatic
	Inches	psi (MPa)						STD	15HR	STD	15HR	15HR
TC5 1/2	500 (3,5)		6.75 (171,5)	5.55 (141,0)	6.50 (165,1)	4.38 (111,1)	3.2 (1,45)	R	R	R	N/A	N/A
	750 (5,2)							N/A	R	N/A	N/A	R
	800 (5,5)							R	N/A	R	N/A	N/A
	1000 (6,9)							R	R	R	N/A	Q
	1250 (8,6)							R	Q	R	N/A	P
	1500 (10,3)							Q	P	T	N/A	N/A
6 5/8	500 (3,5)		6.25 (158,8)	6.77 (172,0)	6.00 (152,4)	3.88 (98,4)	3.5 (2,40)	V	V	S	S	V
	750* (5,2)							N/A	V	N/A	U (5.50 ID)	S
										N/A	S (5.93 ID)	
	800* (5,5)							V	N/A	U (5.50 ID)	N/A	N/A
										S (5.93 ID)		
	1000* (6,9)							V	S	U (5.50 ID)	T (5.50 ID)	Q
									R (5.93 ID)	R (5.93 ID)		
	1250 (8,6)							S	Q	T	N/A	V
8 5/8	500 (3,5)		6.88 (174,8)	8.77 (222,8)	6.63 (168,4)	4.50 (114,3)	5.3 (2,40)	U	U	S	S	U
	750 (5,2)							N/A	U	N/A	R	T
	800 (5,5)							U	N/A	S	N/A	N/A
	1000 (6,9)							T	S	R	N/A	R
8SS	500 (3,5)		8.00 (203,2)	8.79 (223,3)	8.00 (203,2)	4.75 (120,7)	7.5 (3,42)	N/A	N/A	R	N/A	N/A
	800 (5,5)							N/A	N/A	R	N/A	N/A
10SS	500 (3,5)		10.0 (254,0)	11.27 (286,3)	7.00 (177,8)	5.40 (137,2)	8.7 (3,93)	N/A	N/A	R	N/A	N/A
12SS	500 (3,5)		10.0 (254,0)	13.25 (337,1)	7.00 (177,8)	6.10 (154,9)	21.5 (9,74)	N/A	N/A	R	N/A	N/A




***IMPORTANT NOTICE**
It is important to know the ID before ordering 6 5/8" Threaded Adapters.

Sleeve Coupling


Bonded Bell x Bonded Bell

Thread Size	Pipe Pressure Rating		A In (mm)	B In (mm)	X ₁ In (mm)	Wt Lbs (kg)	Anhydride		Aliphatic		Aromatic
	Inches	psi (MPa)					STD	15HR	STD	15HR	15HR
1.90	1250 (8,6)		18.0 (457,2)	2.20 (55,9)	3.00 (76,2)	2.6 (1,2)	N/A	R	N/A	N/A	N/A
	1500 (10,3)						R	R	R	R	R
	1750 (12,1)						R	R	R	R	Q
	2000 (13,8)						R	Q	R	R	Q
2 3/8	750 (5,2)		18.0 (457,2)	3.00 (76,2)	3.75 (95,3)	5.0 (2,3)	N/A	S	N/A	R	N/A
	800 (5,5)						N/A	N/A	R	N/A	N/A
	1000 (6,9)						N/A	S	R	R	S
	1250 (8,6)						S	S	R	R	S
	1500 (10,3)						S	S	R	R	S
	1750 (12,1)						S	S	R	S	Q
	2000 (13,8)						S	Q	R	Q	P



Sleeve Coupling


Bonded Bell x Bonded Bell
(continued)



Thread Size	Pipe Pressure Rating psi (MPa)	A In (mm)	B In (mm)	X ₁ In (mm)	Wt Lbs (kg)	Anhydride		Aliphatic		Aromatic
						STD	15HR	STD	15HR	15HR
2 7/8	750 (5,2)	18.0 (457,2)	3.65 (92,7)	4.00 (101,6)	7.4 (3,4)	N/A	T	N/A	U	T
	800 (5,5)					N/A	N/A	U	N/A	N/A
	1000 (6,9)					T	T	U	U	T
	1250 (8,6)					T	T	U	U	T
	1500 (10,3)					T	T	U	T	Q
	1750 (12,1)					T	S	U	S	Q
	2000 (13,8)					S	Q	U	Q	N/A
3 1/2	500 (3,5)	18.0 (457,2)	4.50 (114,3)	4.25 (114,3)	11.3 (5,1)	N/A	T	U	U	T
	750 (5,2)					N/A	T	N/A	U	T
	800 (5,5)					T	N/A	U	N/A	N/A
	1000 (6,9)					T	T	U	U	T
	1250 (8,6)					T	T	U	U	S
	1500 (10,3)					T	S	U	S	S
4 1/2	500 (3,5)	18.0 (457,2)	5.75 (146,1)	4.50 (114,3)	17.8 (8,1)	T	T	U	U	T
	750 (5,2)					N/A	T	N/A	U	T
	800 (5,5)					T	N/A	U	N/A	N/A
	1000 (6,9)					T	T	U	T	S
	1250 (8,6)					T	S	U	S	R
TC5 1/2	500 (3,5)	18.0 (457,1)	7.50 (190,5)	5.50 (139,7)	33.8 (15,3)	R	R	R	N/A	N/A
	750 (5,2)					N/A	R	N/A	N/A	R
	800 (5,5)					R	N/A	R	N/A	N/A
	1000 (6,9)					R	R	R	N/A	Q
	1250 (8,6)					R	Q	R	N/A	P
6 5/8	500 (3,5)	18.0 (457,2)	7.65 (194,3)	5.00 (127,0)	24.3 (11,0)	V	V	S	S	V
	750* (5,2)					N/A	V	N/A	U (5.50 ID)	S (5.50 ID)
	750* (5,2)							N/A	S (5.93 ID)	S (5.93 ID)
	800* (5,5)					V	N/A	U (5.50 ID)	N/A (5.93 ID)	N/A
	800* (5,5)							S (5.93 ID)	N/A (5.93 ID)	
	1000*					V	S	U (5.50 ID)	U (5.50 ID)	Q
	1000*							S (5.93 ID)	R (5.93 ID)	
1250						S	Q		V	
8 5/8	500	18.0 (457,2)	10.0 (254,0)	5.38 (136,7)	43.7 (19,8)	U	U	S	S	U
	750					N/A	U	N/A	S	T
	800					U	N/A	S	N/A	N/A

IMPORTANT NOTICE
It is important to know the ID before ordering 6 5/8" Sleeve Couplings.

Sleeve Coupling
Bonded Bell x Bonded Bell
(continued)



Thread Size	Pipe Pressure Rating	A	B	X ₁	Wt	Anhydride		Aliphatic		Aromatic
						STD	15HR	STD	15HR	15HR
Inches	psi (MPa)	In (mm)	In (mm)	In (mm)	Lbs (kg)					
8SS	500 (3,5)	8.00 (203,2)	8.79 (223,3)	8.00 (203,2)	7.5 (3,42)	N/A	N/A	R	N/A	N/A
	800 (5,5)					N/A	N/A	R	N/A	N/A
10SS	500 (3,5)	10.0 (254,0)	11.27 (286,3)	7.00 (177,8)	8.7 (3,93)	N/A	N/A	R	N/A	N/A
12SS	500 (3,5)	10.0 (254,0)	13.25 (337,1)	7.00 (177,8)	21.5 (9,74)	N/A	N/A	R	N/A	N/A

National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein nor is any warranty expressed or implied. Always cross-reference the bulletin date with the most current version listed at the web site noted in this literature.

North America
 17115 San Pedro Ave. Suite 200
 San Antonio, Texas 78232 USA
 Phone: 210 477 7500

South America
 Avenida Fernando Simoes
 Recife, Brazil 51020-390
 Phone: 55 31 3501 0023

Europe
 PO. Box 6, 4190 CA
 Geldermalsen, The Netherlands
 Phone: 31 345 587 587

Asia Pacific
 No. 7A, Tuas Avenue 3
 Jurong, Singapore 639407
 Phone: 65 6861 6118

Middle East
 PO. Box 17324
 Dubai, UAE
 Phone: 971 4881 3566

www.fgspipe.com • fgspipe@nov.com

NOV Fiber Glass Systems

© 2013, National Oilwell Varco
 OG8050 May 2013